



ULTRATON

Foshan Ultraton Engineering Machinery Co., Ltd

3 Axles 55T Flatbed Container Transport Semi Truck Trailer



If you need more loading capacity, Ultraton's 3 axles 55T Flatbed Semi Trailer for standard size of the container can meet your different needs on container transport. It can be modified according to customer's requirement.

Overview of 3 Axles 55T Flatbed Container Transport Semi Truck Trailer

- 16 manganese high strength steel is used in heavy duty and extra durability designed for main I beam.
- Flange and web width & thickness could be customized
- Optimized design with advanced computer-aided design software, finite element analysis of the frame according to vehicle load quality requirements
- Welded by automatic submerged-arc process and skilled technicians. Complete chassis shot blasting to clean rust and remove welding stress
- Different thickness of diamond pattern floor plate is optional
- Axles could be optional for German type or American type
- Suspension is optional for mechanical suspension, air suspension
- Other core components are of superior quality and famous brand. Details are outlined as below.




**ULTRATON**

Foshan Ultraton Engineering Machinery Co., Ltd

Advantage of 3 Axles 55T Flatbed Container Transport Semi Truck Trailer

1. Mature technology, could be produced in large quantity at competitive cost
2. Lighter weight with high strength to transport container
3. Packing solution in CKD/ SKD/CBU is optional according to different project.
4. Advanced manufacturing equipment and workmanship to ensure outstanding performance
5. Complete and flexible service from our professional team
6. Distinct location to get full range support on delivery and manufacturing
7. The long term tenet of Ultraton as one of the standout [semi trailer manufacturers](#) to be your reliable partner bringing you Greater value makes you worry free on after sales service

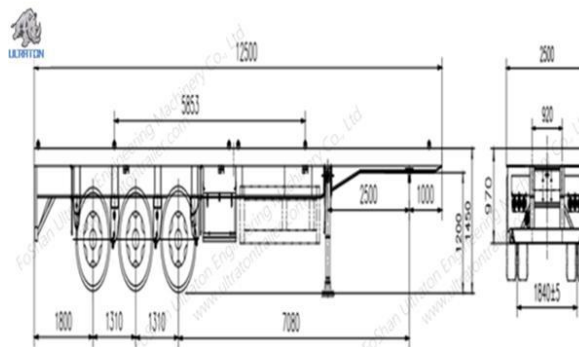

| | |
|--------------------------|---|
| Technical Parameter | 3 Axles 55T Flatbed Container Transport Semi Truck Trailer |
| Tare Weight(KG) | 7000KG |
| Loading Capacity(KG) | 55000KG |
| Dimension(mm) | 13950*2500*1500 |
| Main Beam | The height of the beam is 500 mm, upper Flange is 14mm, Lower Flange is 14mm, Web is 8mm. |
| Kingpin | 2" / 3.5" ,Welded/Bolt-In |
| Landing Gear | Standard 28Ton , FUWA Brand |
| Axle | Standard FUWA Brand / ULTRATON Brand Optional : BPW Brand or HuaJing Brand |
| Suspension | Mechanical Suspension/Air Suspension, Standard FUWA Brand/ULTRATON Brand Optional : BPW Brand or HuaJing Brand |
| Leaf Spring | Standard FUWA Brand/ULTRATON Brand 90mm*16*7 or 90*16*8 |
| Brake system | Dual Air Brake (Drum) System, With Inter-Locking Device.WABCO Relay |
| Electrical System | Emergency Valve, OPTIONS: ABS. 24 Volt LED Electrical System In Accordance To The Standard, With 7-Core Adaptor For Tractor. |
| Tire | 12.00R22.5 Tubeless, 12 Units |
| Rim | 9.0*22.5, 12 Units |
| Shot Blasting & Painting | Shot Blasting and Sanding Treatment . Two Coat Of |



ULTRATON

Foshan Ultraton Engineering Machinery Co., Ltd

| | |
|--|---|
| | Anti Corrosion Primer and Two Coat Of Finish Painting |
| Mud Guard | Fabricated Mud Guard 4 nos |
| Tool Box | 1 Standard (The Tool Box Size Can Be Tailored To Suit Your Needs) |
| Container Locks | 4/8/12 Screw type |
| Spare Tire Carrier | Equipped one sets per chassis without spare tire. |
| Front Baffle | According To Customer's Requirement |
| We Can Build The Trailer According To Customer's Design And Requirement. | |

Application of 3 Axles 55T Flatbed Container Transport Semi Truck Trailer

Ultraton's [3 axles 55T Flatbed Semi Trailer](#) could be used as a basic model to transport standard size of container in ports or from site to site on road. Suitable for logistic company, terminal ports, shipping lines, forwarders, truck manufacturer

